

FIG. 1


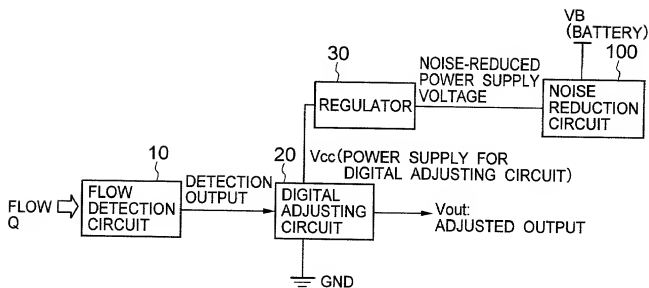


FIG. 2

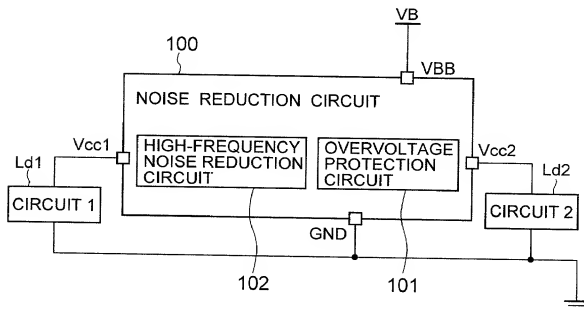

0942030-083001

FIG. 3

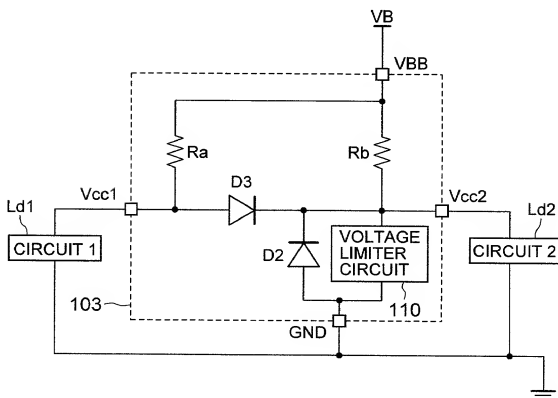


FIG. 4




FIG. 5


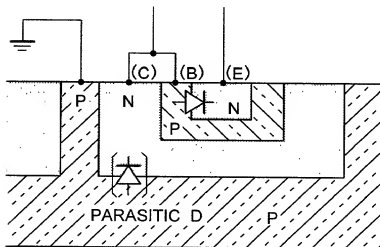


FIG. 6

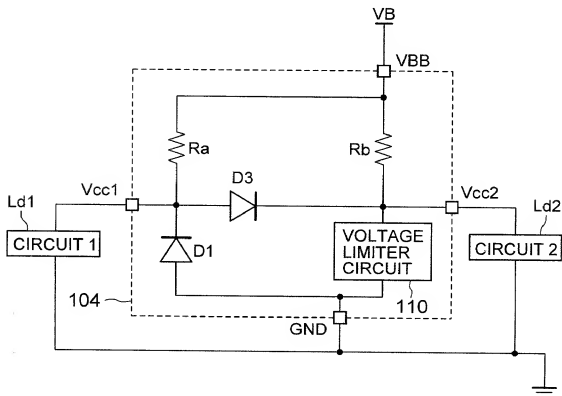

09942030-083001

FIG. 7

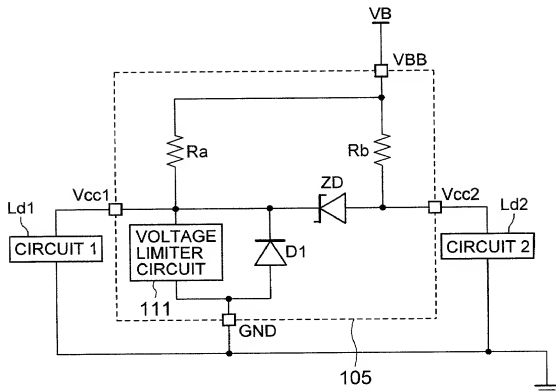


FIG. 8

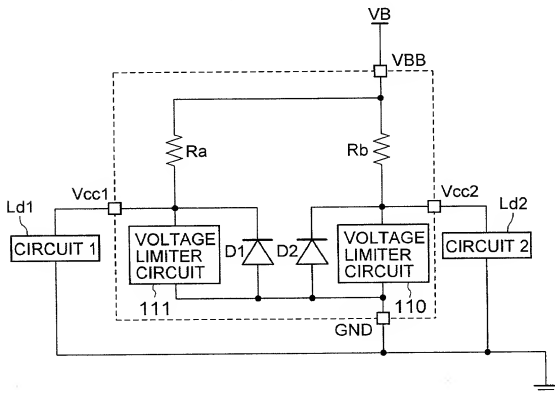


FIG. 10

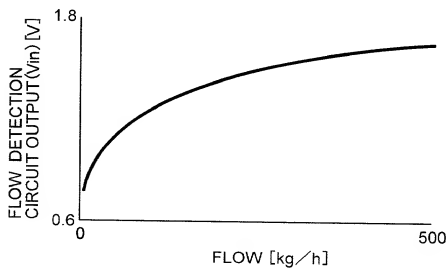


FIG. 11


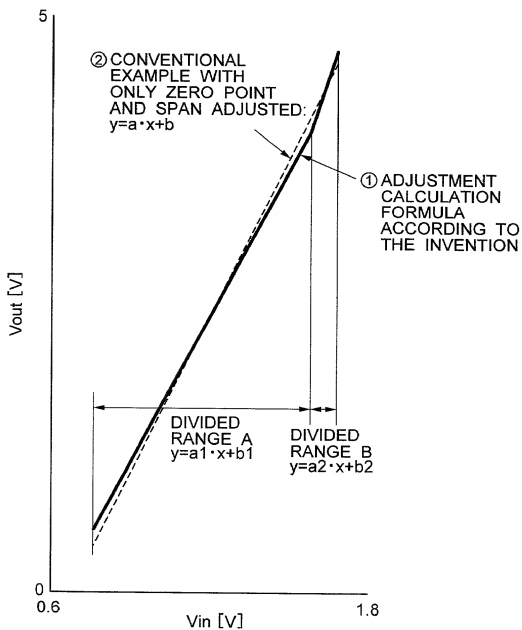


FIG. 12

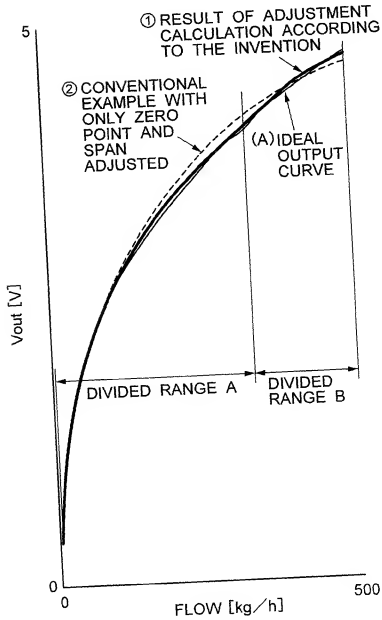

09942030-083001

FIG. 13

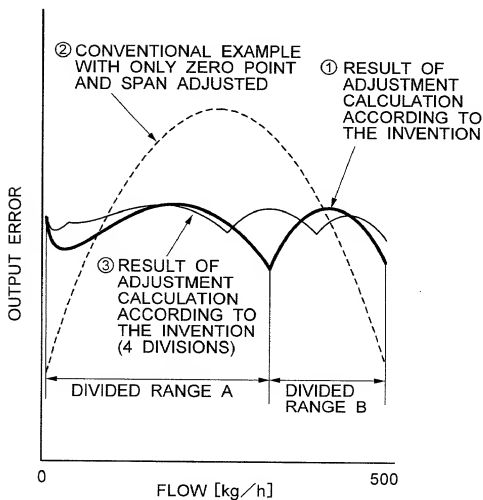


FIG. 14

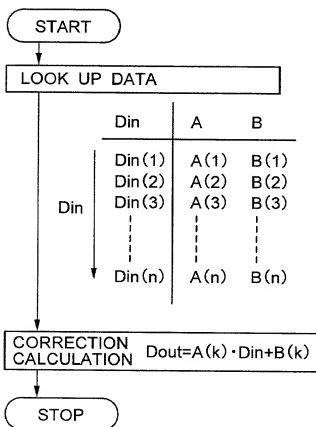


FIG. 15

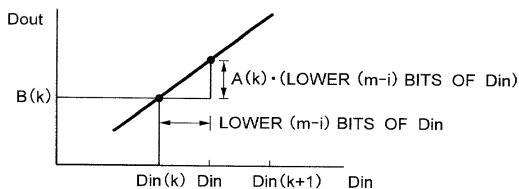


FIG. 16

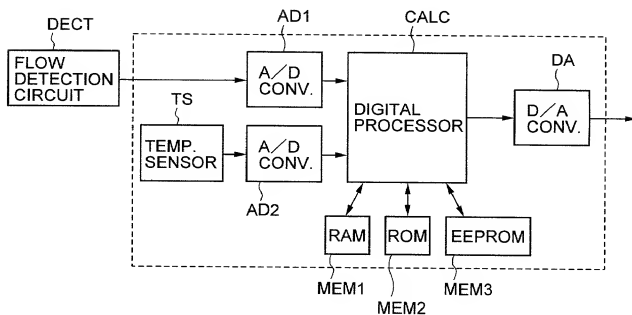


FIG. 17



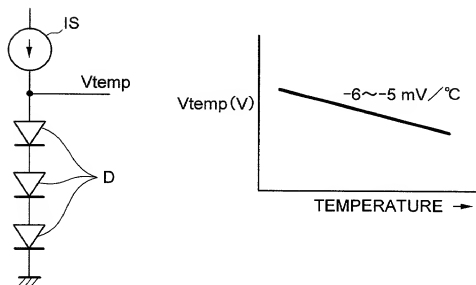


FIG. 18

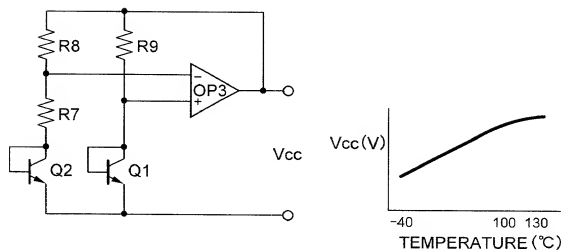


0942030-083001

FIG. 19A

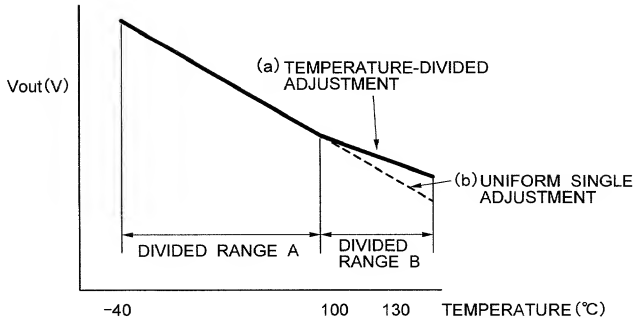

ADJUSTMENT CALCULATION FORMULA FOR
 TEMPERATURE CHARACTERISTIC (CONSTANT FLOW)


FIG. 19B

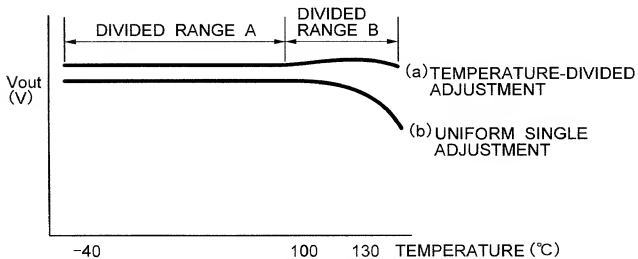

OUTPUT CHARACTERISTIC ERROR AFTER
 TEMPERATURE CHARACTERISTIC ADJUSTMENT
 (CONSTANT FLOW)

09942030-083001

FIG. 20

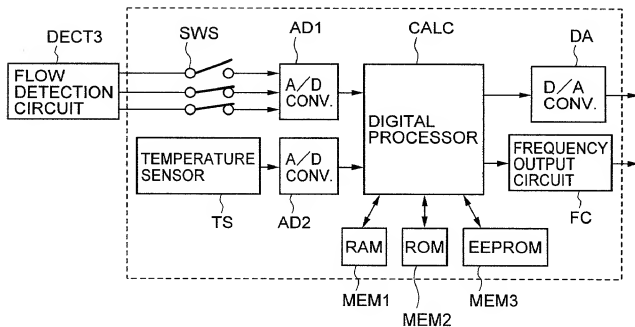

00242030-083001

FIG. 21

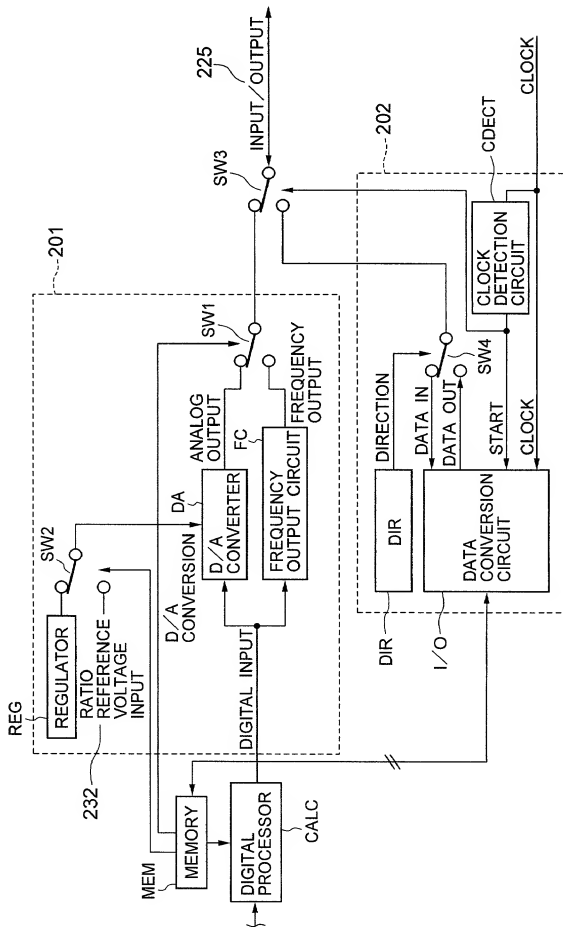


FIG. 22

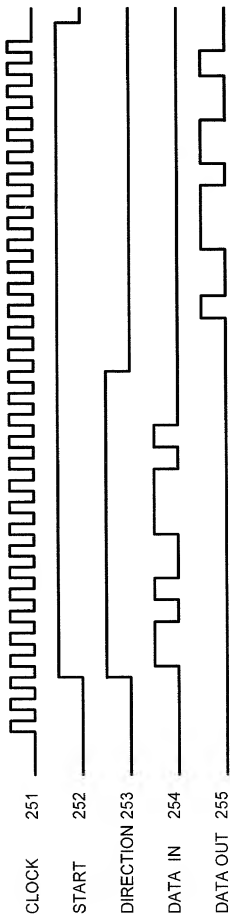


FIG. 23

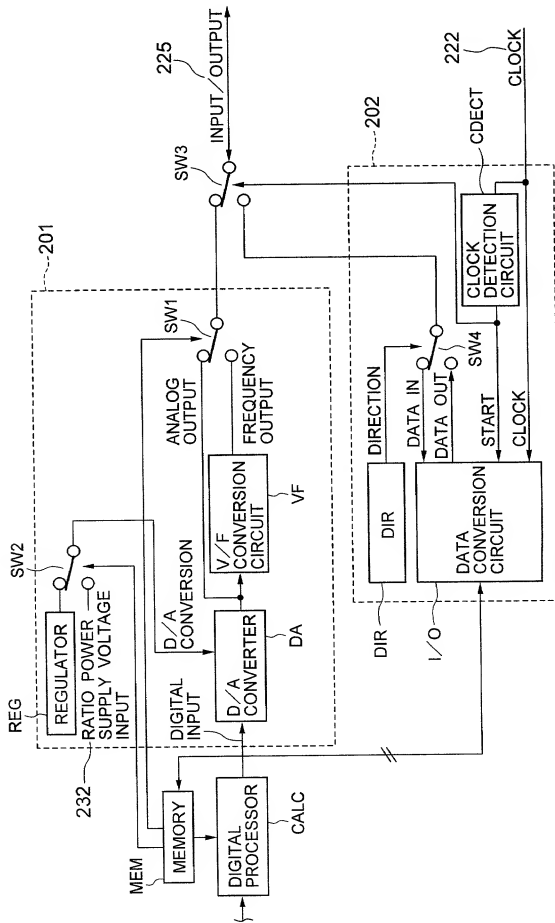


FIG. 24


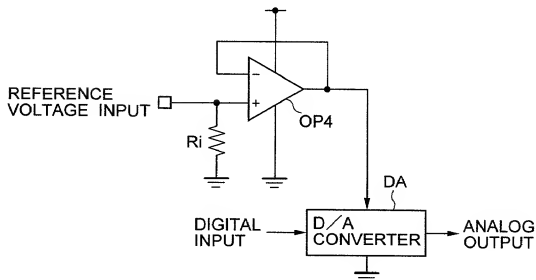



FIG. 25

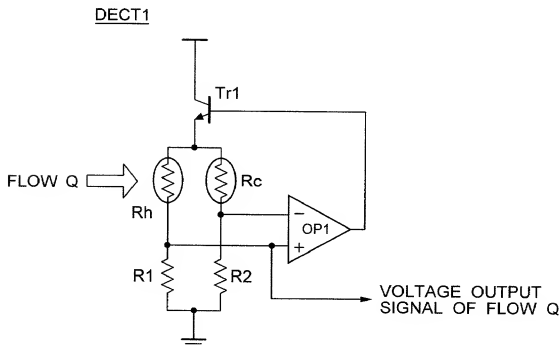

100280-00024660

FIG. 26

DECT2

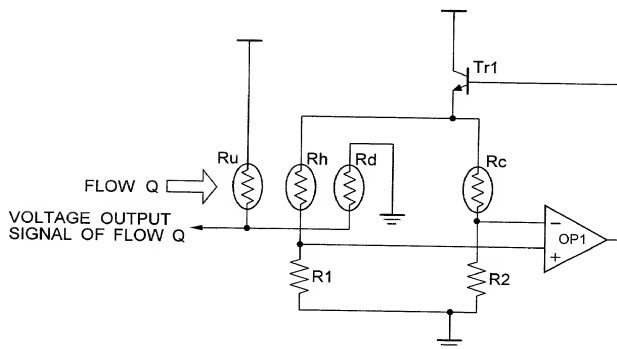

09942030-083001

FIG. 27

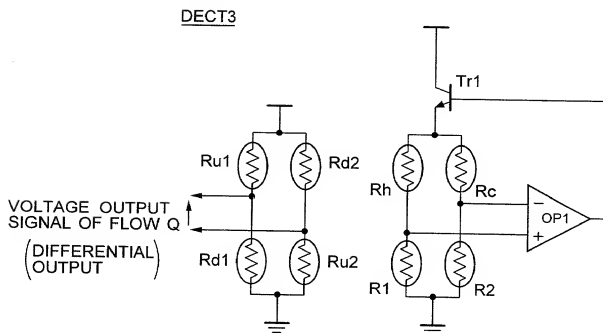


FIG. 28

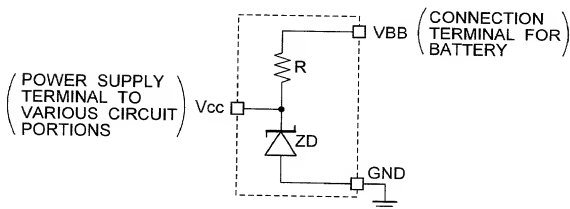


FIG. 29

